


## DIGITAL FOILER SILVER 14 µ

Film for digital foiling (sleeking) applications which provides a spot colored metal finishing to digitally printed cardboards. The optical result is very bright and appealing.

Digital foiler is specifically designed for transfer on toner \*. It also grants excellent performance on screen printing and UV digital coating \*\*. The film is available in various colors.

Applications: photo books, covers, business cards, calendars, gift cards, boxes, leaflets, brochures.

Product code: FGS014 Update November 2020

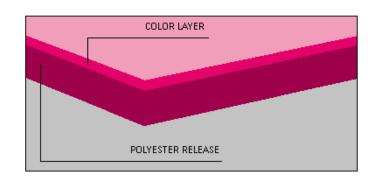

## **TECHNICAL FEATURES**

| PHYSICAL PROPERTIES | TEST METHOD | UNIT        | VALUE  |
|---------------------|-------------|-------------|--------|
| Total thickness     | Internal    | micron (μm) | 14     |
| Release layer       | Internal    | micron (μm) | <1     |
| Adhesive layer      | Internal    | micron (μm) | 1-2    |
| Grammage            | Internal    | g/m²        | 18±0,5 |

| OPTICAL PROPERTIES      | TEST METHOD | UNIT | VALUE   |
|-------------------------|-------------|------|---------|
| Optical density - metal | Internal    | OD   | 1,9-2,0 |

| THERMAL PROPERTIES          |    | TEST METHOD | UNIT | VALUE     |
|-----------------------------|----|-------------|------|-----------|
| Heat shrinkage 150°C 30 min | MD | ASTM D 1204 | %    | 2,5 ±0,5% |
|                             | TD |             |      | 1,5±0,5%  |

| OPERATING CONDITIONS  | TEST METHOD | UNIT | VALUE   |
|---|-------------|------|---------|
| Lamination temperature (to be checked according to lamination conditions) | Internal    | °C   | 105-130 |
| Lamination speed  | Internal    | Step | LOW     |
| Lamination pressure   | Internal    | MPa  | 0,3-0,6 |

<sup>\*</sup>When used on toner it is advisable to print in gray scale and with maximum toner density. We recommend the use of our VELOUR lamination film range.

**Storage:** store in a dry and clean place far from heat sources and humidity (max 30°C and 55% of relative humidity). Do not expose rolls to direct sunlight. Protect the partially used rolls and keep a high stock rotation. The film should be allowed to reach operating room temperature 24 hours before use.

**Note:** trial tests are recommended before proceeding with full production run so as to verify the suitability of the product for its specific application. Verify the compatibility of the film with inks and adhesives. Please visit our web site for more details.

The values indicated represent the best of our knowledge and experience. They are provided simply as a matter of information, taking no responsibility on their absolute truthfulness. Values may be changed without notice. Mag Data S.p.A gives no warranty, expressed or implied, as to the suitability of the product for any specific application.

Tel.: (0039) 0521/525311 Fax: (0039) 0521/525339 E-mail: info@mag-data.com Sito web: www.mag-data.com

<sup>\*\*</sup> Preliminary tests are recommended with screen printing and UV digital coating.