


GOLDEN LIGHT DRY 24 μ

Pet based extrusion coated, mass pigmented gold metallized film for thermal lamination. One side is EVA coated and the other side is acrylic coated. This film is specially designed for high quality gold appearance and grants excellent adhesion with multiple substrates.

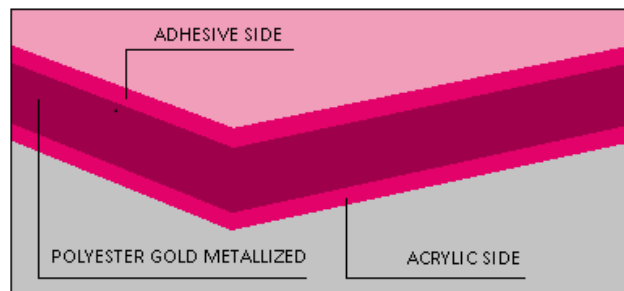

Applications: premium cartons, boxes for perfumes, liquor, cosmetics and gift collection.

Product code: PTD024

Update: December 2020

TECHNICAL FEATURES

PHYSICAL PROPERTIES		TEST METHOD	UNIT	VALUE
Thickness		Micrometer	micron (μm)	24
Grammage		ASTM D 1505	g/m ²	28,23
Yield		Internal	m ² /kg	35,42
Coefficient of friction		ASTM D 1894	-	-
			-	-
Surface tension	Coated side	ASTM D 2578	Dyne/cm	44-46
	Acrylic side			44

THERMAL PROPERTIES	TEST METHOD	UNIT	VALUE
Recommended lamination temperature (to be checked according to lamination conditions)	Internal	°C	90-110

Storage: store in a dry and clean place far from heat sources and humidity (max 30°C and 55% of relative humidity). Do not expose rolls to direct sunlight. Protect the partially used rolls and keep a high stock rotation. The film should be allowed to reach operating room temperature 24 hours before use.

Note: trial tests are recommended before proceeding with full production run so as to verify the suitability of the product for its specific application. Verify the compatibility of the film with inks and adhesives. Please visit our web site for more details.

The values indicated represent the best of our knowledge and experience. They are provided simply as a matter of information, taking no responsibility on their absolute truthfulness. Values may be changed without notice. Mag Data S.p.A gives no warranty, expressed or implied, as to the suitability of the product for any specific application.

Mag Data – S.p.A. a socio unico

Strada della Selva 100 - 43052 Colorno (Pr) - Italy

P. IVA/C.F. 02551830348

Tel.: (0039) 0521/525311 Fax: (0039) 0521/525339

E-mail: info@mag-data.com Sito web: www.mag-data.com