


PURE WOOD DRY 37 μ

Biaxially oriented polypropylene film partially acrylic coated and wood-structured on one side. The other side is coated with EVA hotmelt. The EVA needs some time for optimal bonding. The time for bonding depends on the base material used and should be tested before further processing. The foil can be used for materials of various kinds. The film is scratch proof, tear resistant and odorless. The gluability and printability of the film is always subordinate to the result of preliminary tests. The optimum processing temperature of the laminating roll is between 100°C and 115°C (to be checked according to lamination conditions).

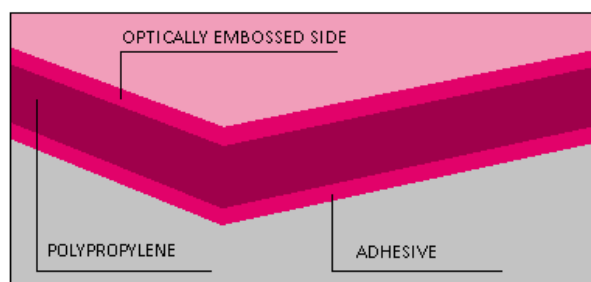

Product code: LWT037

Update: December 2020

TECHNICAL FEATURES

| PHYSICAL PROPERTIES | TEST METHOD | UNIT | VALUE |
|---------------------|-------------|--------------------|--------|
| Thickness | Internal | micron (μm) | 38±5% |
| Grammage | Internal | g/m ² | ≈27,6 |
| Yield | Internal | m ² /kg | ≈36,23 |

| OPTICAL PROPERTIES | TEST METHOD | UNIT | VALUE |
|--------------------|-------------|------|-------|
| Gloss at 60° | Internal | GU | ≈7 |

Storage: store in a dry and clean place far from heat sources and humidity (max 30°C and 55% of relative humidity). Do not expose rolls to direct sunlight. Protect the partially used rolls and keep a high stock rotation. The film should be allowed to reach operating room temperature 24 hours before use.

Note: trial tests are recommended before proceeding with full production run so as to verify the suitability of the product for its specific application. Verify the compatibility of the film with inks and adhesives. Please wait some time after lamination to allow maximum film adhesion before proceeding with further jobs. Please visit our web site for more details.

The values indicated represent the best of our knowledge and experience. They are provided simply as a matter of information, taking no responsibility on their absolute truthfulness. Values may be changed without notice. Mag Data S.p.A gives no warranty, expressed or implied, as to the suitability of the product for any specific application.

Mag Data – S.p.A. a socio unico

Strada della Selva 100 - 43052 Colorno (Pr) - Italy

P. IVA/C.F. 02551830348

Tel.: (0039) 0521/525311 Fax: (0039) 0521/525339

E-mail: info@mag-data.com Sito web: www.mag-data.com