


PURE WOOD WET 30μ

Opaque biaxially oriented polypropylene film partially acrylic coated with a wood effect structure on one side. The other side is corona treated. The film is scratch - proof, tear resistant and scentless. The film is suitable for lamination with all commercial adhesives (water based, solventless and solvent based). Tests are always recommended.

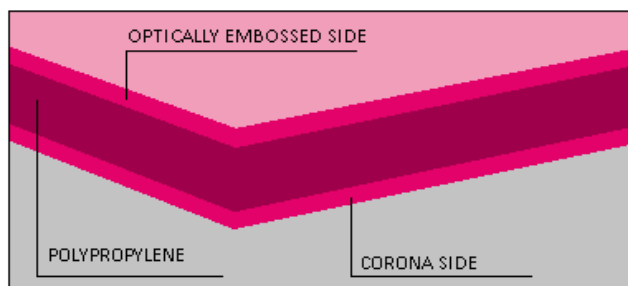

Product code: LWG030
Update: November 2020

TECHNICAL FEATURES

PHYSICAL PROPERTIES	TEST METHOD	UNIT	VALUE
Thickness	Internal	micron (μm)	30±5%
Grammage	Internal	g/m ²	≈17,43
Yield	Internal	m ² /kg	≈57,73

OPTICAL PROPERTIES	TEST METHOD	UNIT	VALUE
Gloss 60°*	ASTM D 2457	GE	≈7,0

* Values subject to modifications

Storage: store in a dry and clean place far from heat sources and humidity (max 30°C and 55% of relative humidity). Do not expose rolls to direct sunlight. Protect the partially used rolls and keep a high stock rotation. The film should be allowed to reach operating room temperature 24 hours before use.

Note: trial tests are recommended before proceeding with full production run so as to verify the suitability of the product for its specific application. Verify the compatibility of the film with inks and adhesives. Please wait some time after lamination to allow maximum film adhesion before proceeding with further jobs. Please visit our web site for more details.

The values indicated represent the best of our knowledge and experience. They are provided simply as a matter of information, taking no responsibility on their absolute truthfulness. Values may be changed without notice. Mag Data S.p.A gives no warranty, expressed or implied, as to the suitability of the product for any specific application.

Mag Data – S.p.A. a socio unico

Strada della Selva 100 - 43052 Colorno (Pr) - Italy

P. IVA/C.F. 02551830348

Tel.: (0039) 0521/525311 Fax: (0039) 0521/525339

E-mail: info@mag-data.com Sito web: www.mag-data.com