


## SANDY DRY 50μ

Biaxially oriented matt polypropylene film for thermal lamination.

The matt finish grants extra protection to the printed and laminated jobs and behaves better in terms of curling compared to screen printing varnishes.

The film enhances color and offers a sensational tactile sandy effect. It is suitable for finishes such as hot

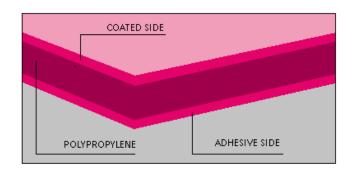

stamping and spot UV coating. It is glueable, stampable and printable by traditional offset with oxidative inks (specifically for non-porous materials).

Applications: hard and soft book covers, luxury and electronic packaging, rigid boxes, business and trading cards, luxury folding cartons.

Product code: SND050 Update: December 2020

## TECHNICAL FEATURES

PHYSICAL PROPERTIES	TEST METHOD	UNIT	VALUE
Thickness	Internal	micron (μm)	50
Grammage	Internal	g/m²	32,20
Yield	Internal	m²/kg	31,06
Coefficient of Friction	ASTM D 1894	-	0,5
Dyne level	ASTM D 2578	Dyne/cm	≥38

OPTICAL PROPERTIES	TEST METHOD	UNIT	VALUE
Gloss 45°	ASTM D 2457	%	9

**Storage:** store in a dry and clean place far from heat sources and humidity (max 30°C and 55% of relative humidity). Do not expose rolls to direct sunlight. Protect the partially used rolls and keep a high stock rotation. The film should be allowed to reach operating room temperature 24 hours before use.

**Note:** trial tests are recommended before proceeding with full production run so as to verify the suitability of the product for its specific application. Verify the compatibility of the film with inks and adhesives. Please wait some time after lamination to allow maximum film adhesion before proceeding with further jobs. Please visit our web site for more details.

The values indicated represent the best of our knowledge and experience. They are provided simply as a matter of information, taking no responsibility on their absolute truthfulness. Values may be changed without notice. Mag Data S.p.A gives no warranty, expressed or implied, as to the suitability of the product for any specific application.